

Features

- Simultaneous display of %RH, temperature and dew point or wet bulb
- Optional external probe (87P6) for contact/differential temperature measurement
- Max/Min/Avg readings
- Fast response
- Data Hold Function
- User selectable °F/°C
- Low battery indicator and auto shut-off
- Includes batteries

Specifications

Temperature

Measuring Range: -4 to 158°F (-20 to 70°C)
 Accuracy: ±1.0°F (0.6°C)
 Resolution: 0.1°F/°C

Contact Temperature (Probe sold separately)

Measuring Range: -4 to 122°F (-20 to 50°C)
 Accuracy: ±1.0°F (0.6°C)
 Resolution: 0.1°F/°C

Dew Point

Measuring Range: -109 to 122°F (-78 to 50°C)
 Resolution: 0.1°F/°C

Wet Bulb

Measuring Range: -69 to 122°F (-21 to 50°C)
 Resolution: 0.1°F/°C


Humidity

Measuring Range: 0-100% RH
 Accuracy: ±3% RH
 Resolution: 0.1% RH

General Specifications

Display: LCD
 Data Hold: Yes
 Min: Yes
 Max: Yes
 Auto Shut-off: Yes (5 mins/off)
 Low Battery Indicator: Yes
 Power Supply: 2 AAA Batteries
 Product Certifications: CE
 Operating Temperature: -4 to 158°F (-20 to 70°C)
 Storage Temperature: 14 to 140°F (-10 to 60°C)
 Operating Humidity Range: 10-80%
 Dimensions: 7 x 1.9 x 1" (179 x 48 x 25mm)
 Weight: 3.3 oz (95g)

TECHNICAL DATA

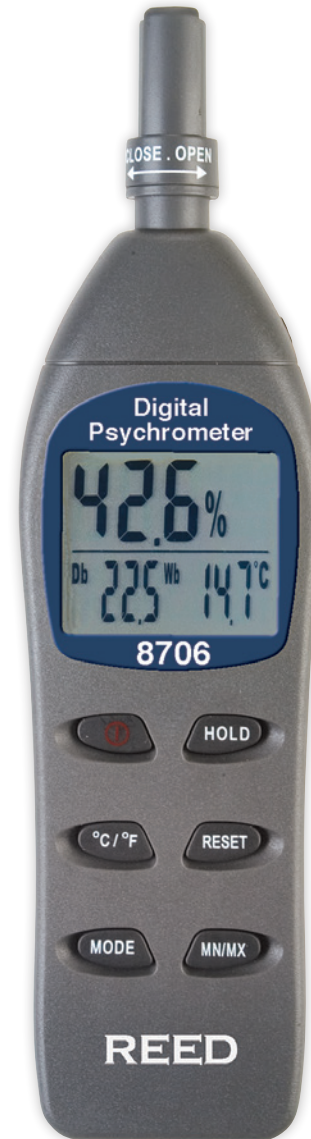

| Model | Description |
|-----------|-----------------------------------|
| 8706 | Digital Psychrometer |
| 87P6 | External Temperature Probe |
| R9933 | 33% Humidity Calibration Standard |
| R9975 | 75% Humidity Calibration Standard |
| R9980 | Humidity Calibration Kit |
| CA-52A | Soft Carrying Case |
| 8706-NIST | Digital Psychrometer & NIST |