

**Model BETALUX MP**

# **RUNNING MAN®**

**SELF-LUMINOUS EMERGENCY EXIT SIGNS  
ALWAYS ON ... ALWAYS WORKING**



**NO WIRING  
NO ELECTRICITY  
NO BATTERIES  
NO MAINTENANANCE**

**HOTELS**



**HOSPITALS**



**AIRPORTS**



**SCHOOLS**



Our signs are used in locations like these and many others around North America and around the world.

**NO WIRING**

**NO ELECTRICITY**

**NO BATTERIES**

**NO MAINTENANCE**



**SRB Technologies (Canada) Inc.**

320 Boundary Road, Unit 140, Pembroke Ontario K8A 6W5, Canada  
Tel. (613) 732-0055 Fax. (613) 732-0056 Toll Free. 1-800-552-0098  
[www.srbt.com](http://www.srbt.com)

## FEATURES

- Vandal resistant
- Operating temperature -22°F to 149°F
- Explosion Proof (not a source of ignition)
- Impervious to water
- Requires no wiring
- Installs in minutes
- Suitable for clean room applications
- No bulbs to fail or replace
- Corrosion resistant
- Fail safe
- Recyclable if returned to manufacturer
- Lightweight
- 15 year life
- Totally self powered
- Manufactured in an ISO 9001 facility

## SPECIFICATIONS

### ILLUMINATION SOURCE

- Borosilicate (hard) glass.
- Internally coated with phosphorescent powder.
- Filled with tritium gas.

### BRIGHTNESS

- Minimum brightness at time of manufacture of 0.15 foot lamberts (0.51 cd/m<sup>2</sup> or 160 µL).
- Rated viewing distance of 50 feet.
- Service life of 15 years.

### COMPLIES WITH

- UL 924
- CAN/ULC-S572
- BS 5499: Part 2: 1986

### CONSTRUCTION

- Encased in high-impact, fire-retardant ABS plastic.

## ORDERING INFORMATION


MODEL	SERVICE LIFE	FRAME COLOUR	FACES	LEGEND COLOUR
BETALUX-MP	15 Years	GY - Grey	S - Single	GN - Green
		BK - Black	D - Double	
		WH - White		

ACCESSORIES				
WG - Wire Guard	AF - Aluminum Frame	PW - Polycarbonate Window	PM - Pendant Mount	SC - Security Cover


**Ordering Example:** BETALUX-MP-15-BK-S-GN = BETALUX MP, 15 year, black frame, single face with green legend.

## INSTALLATION


1. Case
2. Reflector & Lights with Clear Cover
3. Diffuser Sheet
4. Legend
5. Clear Window
6. Frame
7. Frame Release Button

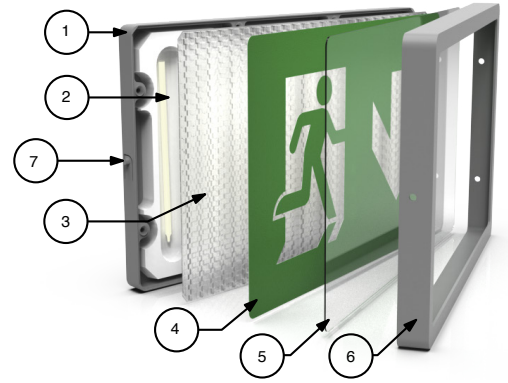

Remove the Frame, Clear Window, Legend and Diffuser, then select the best two surface mounting holes for your application.

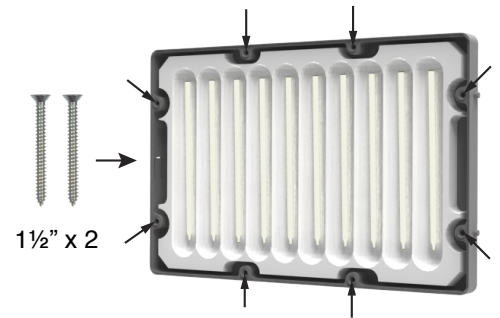

Bracket placement for Flag and Ceiling Mounting.

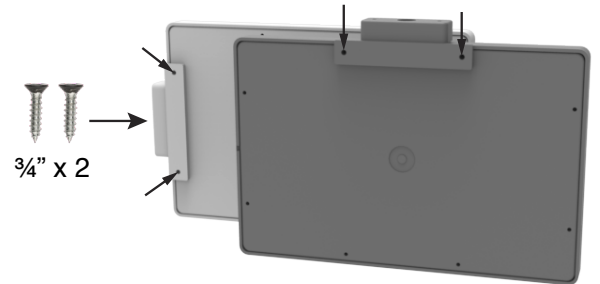

## DIMENSIONS

