





# 40 Spun-bond Socks in Maintenance

**40GS34-SB**

Socks | Spun-Bond | Maintenance

**Absorbency:** 110 Litres | 29 US Gallons of oil\*\*  
130 Litres | 34.5 US Gallons of water\*\*

**Base Fibre:** Super Absorbent Flake

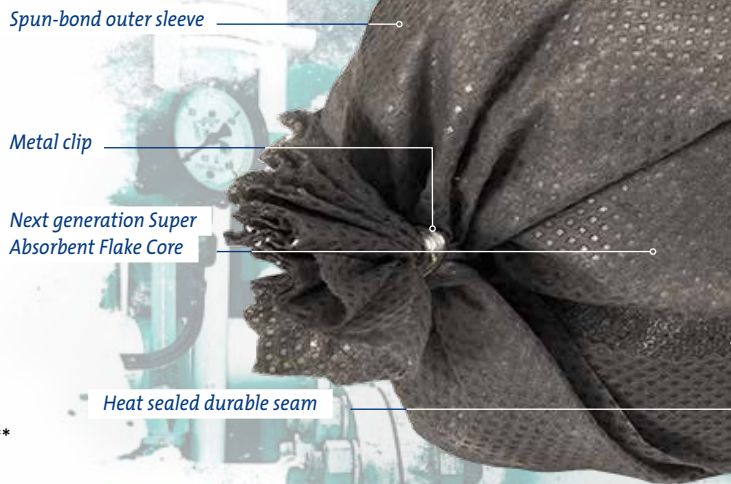

Product Code	Colour	Format	Size cm(inches)	Recycled Content	Units/Case	Weight/Case***	LTL/Pallet	FTL/Pallet
<b>Maintenance</b>								
40GS34-SB	Grey	Sock	8 cm x 1.2 m (3" x 4')	95%*	40/ box	14.5 kg (32 lbs)	20	20



This product is in a Maintenance format



This product features recycled fibres



This product comes in a long box and contains 40 socks

These socks are 1.2 metres in length and eight centimetres in diameter. There are 40 socks in the branded cardboard box. The socks feature a spun-bond outer sleeve that has a durable heat sealed seam running its entire length. This tube is then filled with a next generation absorbent core that will absorb both oil-based and water-based fluids. The absorbent core is secured into the sleeve at each end with a durable metal clip.

A unique feature of these socks is their ability to contain large quantities of liquids once absorbed. They are an excellent product for placing around machinery or in workshop areas to prevent leaks or spills from spreading. These socks are also a key component in any spill kit.

**Key features**

- Will not become slippery even when fully saturated. Contains no poly-acrylate.
- Strong spun-bond polypropylene outer sleeve.
- Features a super absorbent core.
- Clipped ends secure the core into the outer spun-bond cylindrical sleeve.

**Notes**

- Ensure that disposal of these sorbents complies with all regulations.

**Super Absorbent Flake Socks**  
See this product in action on our website



\* Basis weights and recycled content are ± 5%  
\*\* Measures a case/bale using ASTM 726 (long test) with medium viscosity oil and tap water. Statistical average derived from real time production QC data.  
\*\*\* Weight per case ± 0.5 kg/lbs.

**Compliance**

Related Regulations	Description
29CFR 1910.22(a)(2) 29CFR 1910.120(j)(1)(vii)	"The floor of every workroom shall be maintained in a clean and, so far as possible, a dry condition." "... suitable quantities of proper absorbents shall be kept available and used in areas where spills, leaks or ruptures may occur."